

## 2015@ Baltimore Aircoil Company. All Rights Reserved.




Model Number	Approx, Shipping Weight	Approx, Operating Weight	Heaviest Section Weight	F	н
PCC-0249-1212N010	16780	24310	13930	4'-8 1/8"	16'-8 1/4"
PCC-0265-1212N015	15420	22870	12570	4'-0 5/8"	16'-0 3/4"
PCC-0293-1212N015	19000	26660	16150	5'-3 5/8"	17'-3 3/4"
PCC-0309-1212N020	17780	25370	14930	4'-8 1/8"	16'-8 1/4"
PCC-0330-1212N025	17810	25400	14960	4'-8 1/8"	16'-8 1/4"
PCC-0346-1212N025	20100	27830	17250	5'-3 5/8"	17'-3 3/4"
PCC-0365-1212N030	20150	27880	17300	5'-3 5/8"	17'-3 3/4"
PCC-0396-1212N040	20340	28060	17490	5'-3 5/8"	17'-3 3/4"
PCC-0355-1212N025	21200	29040	18350	4'-0 5/8"	16'-0 3/4"
PCC-0375-1212N030	21250	29090	18400	4'-0 5/8"	16'-0 3/4"
PCC-0395-1212N040	20270	28040	17420	4'-0 5/8"	16'-0 3/4"
PCC-0406-1212N040	21440	29280	18590	4'-0 5/8"	16'-0 3/4"

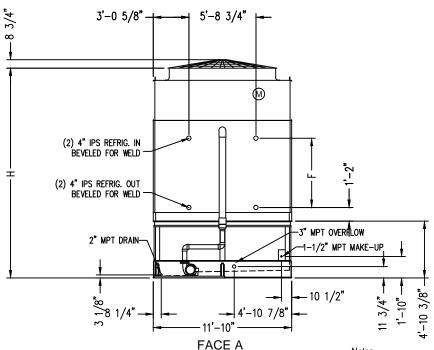

- 1) Drawings are not to scale. All dimensions are in feet and inches.
- 2) Unless otherwise indicated, connections 3" and smaller are MPT. Connections 4" and larger are grooved to suit a mechanical coupling and beveled for welding.
- 3) Dimensions showing location of coil and basin connections are approximate and should not be used for prefabrication of connecting piping.
- 4) For weight loadings and support requirements, refer to the suggested steel support drawing.
- 5) Heaviest section is the combined weight of fan and coil sections, refer to the P-Series Counterflow Induced Draft Coil Products rigging and assembly manual for suggested lifting method.
- 6) The area above the discharge must be unobstructed.
- 7) Do not support piping from unit connections. All necessary piping supports to be supplied by others. 8) M = Motor location

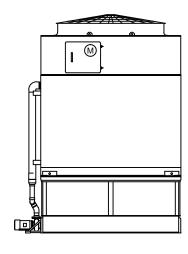

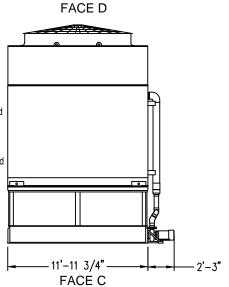

ORDER NO:

DATE:



**PCC Evaporative Condenser Tabulated Unit Print** 

DRAWING NUMBER:

**UP-PCC-1212**