
## 2015© Baltimore Aircoil Company. All Rights Reserved.

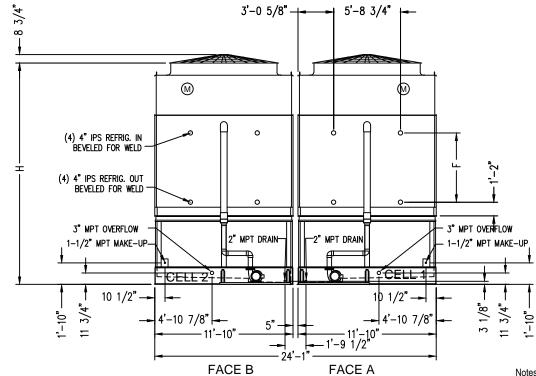

Model Number	Approx, Shipping Weight	Approx, Operating Weight	Heaviest Section Weight	F	н
PCC-0498-2412N020	33670	48750	13930	4'-8 1/8"	17'-8 1/4"
PCC-0530-2412N030	30960	45870	12570	4'-0 5/8"	17'-0 3/4"
PCC-0586-2412N030	38130	53450	16150	5'-3 5/8"	18'-3 3/4"
PCC-0618-2412N040	35680	50860	14930	4'-8 1/8"	17'-8 1/4"
PCC-0660-2412N050	35740	50920	14960	4'-8 1/8"	17'-8 1/4"
PCC-0692-2412N050	40330	55780	17250	5'-3 5/8"	18'-3 3/4"
PCC-0730-2412N060	40430	55880	17300	5'-3 5/8"	18'-3 3/4"
PCC-0792-2412N080	40810	56250	17490	5'-3 5/8"	18'-3 3/4"
PCC-0710-2412N050	42520	58210	18350	4'-0 5/8"	17'-0 3/4"
PCC-0750-2412N060	42620	58310	18400	4'-0 5/8"	17'-0 3/4"
PCC-0790-2412N080	40660	56200	17420	4'-0 5/8"	17'-0 3/4"
PCC-0812-2412N080	43000	58680	18590	4'-0 5/8"	17'-0 3/4"

## Notes

1) Drawings are not to scale. All dimensions are in feet and inches.

2) Unless otherwise indicated, connections 3" and smaller are MPT. Connections 4" and larger are grooved to suit a mechanical coupling and beveled for weldina.


3) Dimensions showing location of coil and basin connections are approximate and should not be used for prefabrication of connecting piping.

4) For weight loadings and support requirements, refer to the suggested steel support drawing.

5) Heaviest section is the combined weight of fan and coil sections, refer to the P-Series Counterflow Induced Draft Coil Products rigging and assembly manual for

suggested lifting method. 6) The area above the discharge must be unobstructed. 7) Do not support piping from unit connections. All

necessary piping supports to be supplied by others. 8) M = Motor location

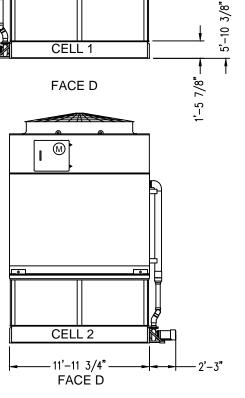

•

ORDER NO:



**PCC Evaporative Condenser Tabulated Unit Print** 

DRAWING NUMBER: **UP-PCC-2412** 

M

**\_**• 1