


Notes

- 1) All dimensions are in feet and inches. Weights are in pounds and include options and accessories.
- 2) Unless otherwise indicated, connections 3" and smaller are NPT. Connections 4" and larger are grooved to suit a mechanical coupling and beveled for welding.
- 3) For weight loadings and support requirements, refer to the suggested steel support drawing.
- 4) The area above the fan discharge must be unobstructed.
- 5) Piping must not be supported by the tower inlet or outlet connections.
- 6) Unit weights include selected accessories.
- 7) M = Motor location.

Model Number	Shipping Weight	Operating Weight	Heaviest Section	"H"	"B"	"D"	"L"
PT2-1212A-1x3	19640	35350	4600	15'-10 1/2"	9'-11 1/4"	8'-4"	6'-10 3/8"
PT2-1212A-2x3	21300	37010	5150	16'-10 1/2"	10'-11 1/4"	9'-4"	6'-10 3/8"
PT2-1212A-3x3	23440	39150	5870	17'-10 1/2"	11'-11 1/4"	10'-4"	6'-10 3/8"
PT2-1212A-4x3	24180	41480	5870	19'-8 1/2"	13'-9 1/4"	10'-4"	8'-8 3/8"
PT2-1212A-5x3	25440	42760	6290	20'-8 1/2"	14'-9 1/4"	11'-4"	8'-8 3/8"

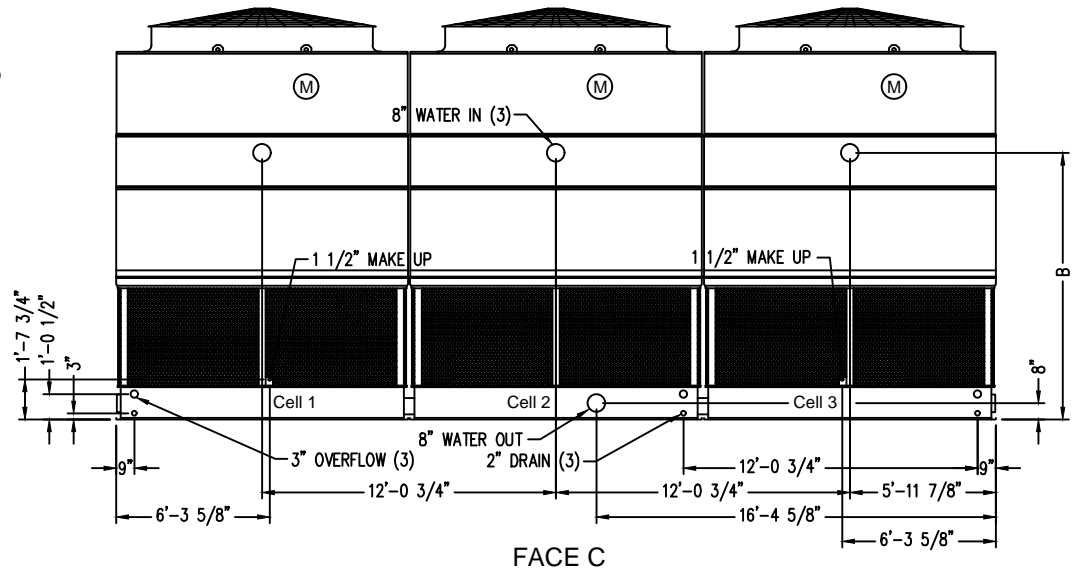

ORDER NO:

DATE:



**BALTIMORE
AIRCOIL COMPANY**

**PT2 Three Cell Unit Print
Internal Belt Drive**

DRAWING NUMBER:
GEN-PT2-1212A 3-CELL