


Notes

- 1) All dimensions are in feet and inches. Weights are in pounds. Values listed are for standard construction units with no additional options and accessories; exact values may vary depending upon unit configuration.
- 2) Operating weight and weight loading are for units with water level in basin at overflow.
- 3) Unit support beams and anchor bolts to be designed and furnished by others.
- 4) Support beams must be flush and level at top.
- 5) Each beam should be designed, as a minimum, for 65% of the total unit operation weight applied as a uniformly distributed load.

Model Number	Operating Weight	Shipping Weight
XES15E-1218-09EN	26890	11800
XES15E-1218-09FN	26950	11860
XES15E-1218-09GN	27040	11950
XES15E-1218-09HN	27070	11980
S15E-1218-09JN	27220	12130
S15E-1218-09KN	27260	12170
S15E-1218-09LC	27640	12550
S15E-1218-09LN	27640	12550
XES15E-1218-10EN	28190	12310
XES15E-1218-10FN	28250	12370
XES15E-1218-10GN	28340	12460
XES15E-1218-10HN	28370	12490
XES15E-1218-10JN	28520	12640
S15E-1218-10KN	28560	12680
S15E-1218-10LC	28940	13060
S15E-1218-10LN	28940	13060
S15E-1218-10MN	29120	13240

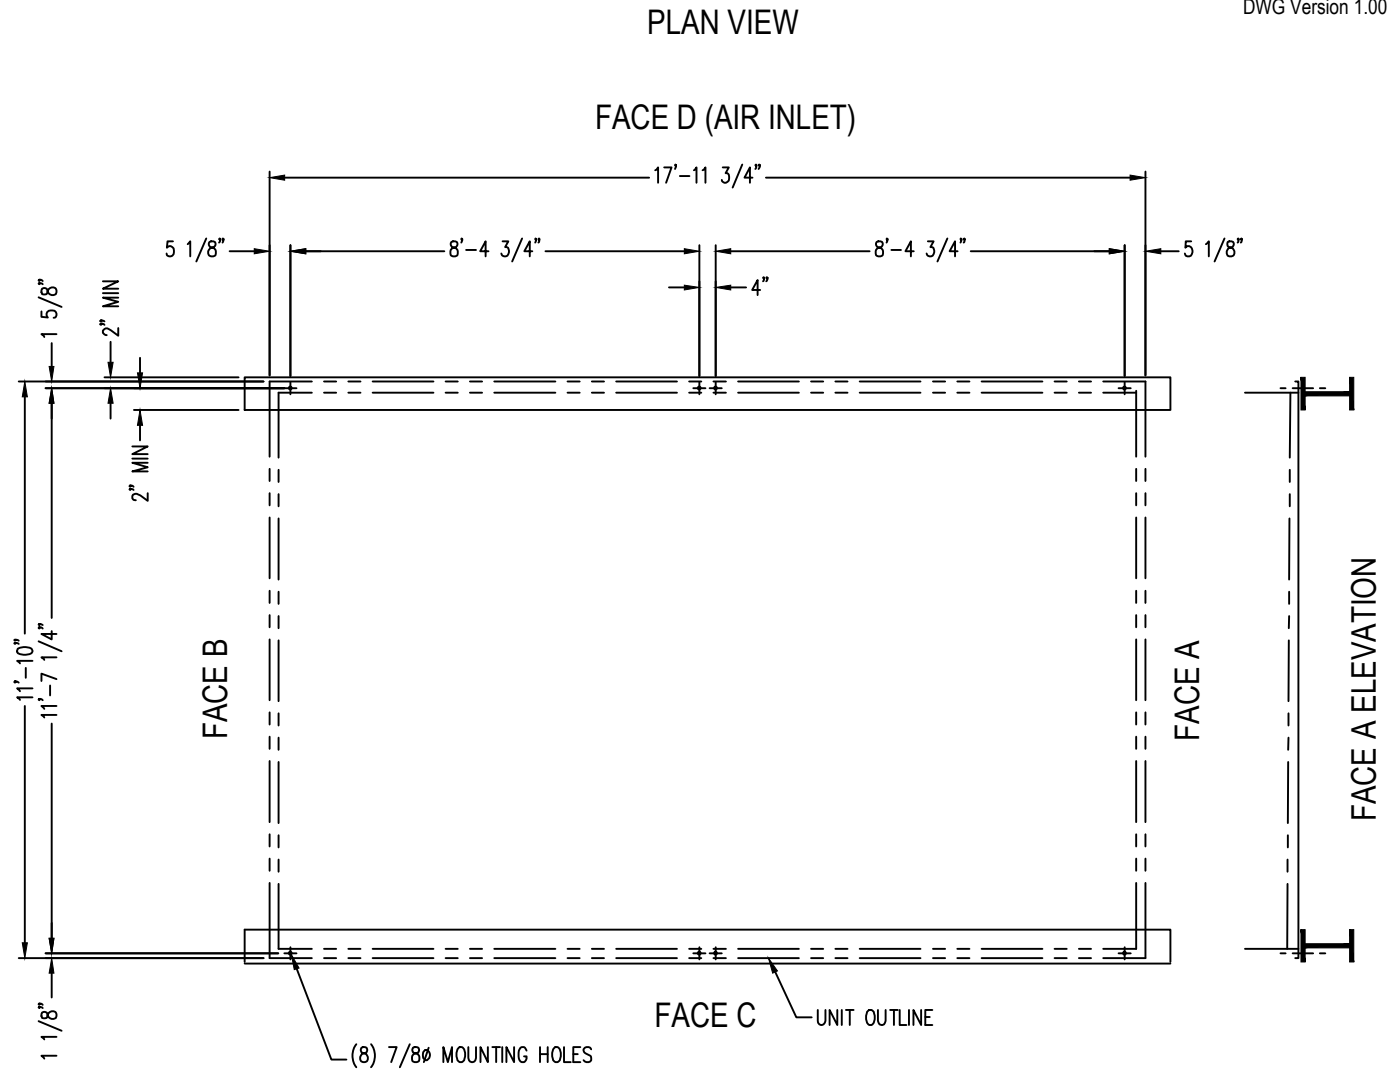

ORDER NO:

DATE: **3/18/2014**



BALTIMORE AIRCOIL COMPANY

**Single Cell Unit Support
1218-09-10 Plan "A" Steel**

DRAWING NUMBER:
SS-XE-S15E-1218-09-10