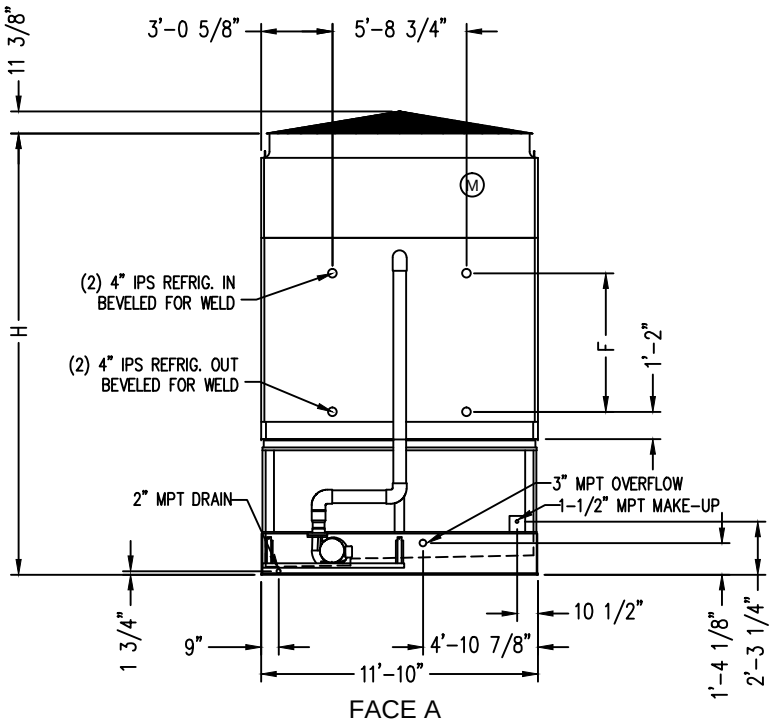

FACE A

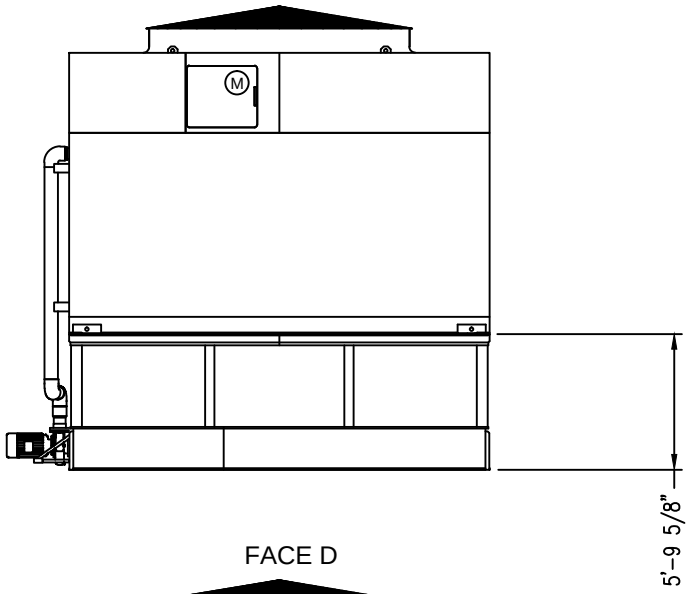

FACE D

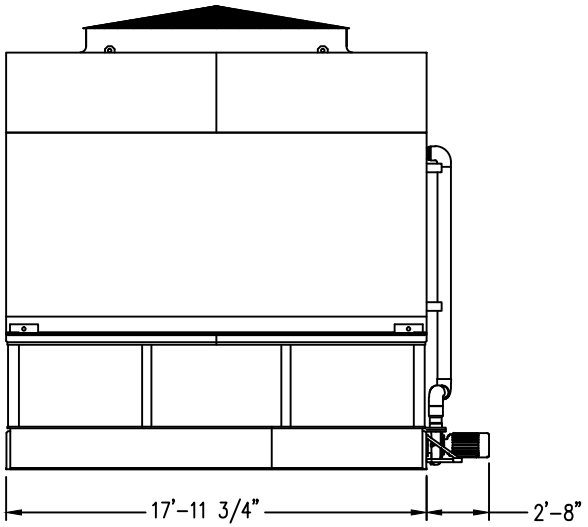

FACE C

Model Number	Approx, Shipping Weight	Approx, Operating Weight	Heaviest Section Weight	F	H
PCC-0494-1218N040	23050	34100	18730	4'-0 5/8"	17'-0"
PCC-0381-1218N015	23790	34910	19470	4'-8 1/8"	17'-7 1/2"
PCC-0441-1218N020	26080	37340	21760	4'-8 1/8"	17'-7 1/2"
PCC-0531-1218N040	26450	37710	22130	4'-8 1/8"	17'-7 1/2"
PCC-0564-1218N050	26550	37810	22240	4'-8 1/8"	17'-7 1/2"
PCC-0469-1218N020	29680	41210	25360	4'-0 5/8"	17'-0"
PCC-0517-1218N030	29930	41460	25610	4'-0 5/8"	17'-0"
PCC-0541-1218N040	28570	40010	24250	4'-0 5/8"	17'-0"
PCC-0572-1218N040	31820	43460	27500	4'-0 5/8"	17'-0"
PCC-0590-1218N050	30150	41680	25840	4'-0 5/8"	17'-0"
PCC-0609-1218N050	31920	43570	27610	4'-0 5/8"	17'-0"
PCC-0639-1218N060	32020	43670	27710	4'-0 5/8"	17'-0"

Notes
1) Drawings are not to scale. All dimensions are in feet and inches.
2) Unless otherwise indicated, connections 3" and smaller are MPT. Connections 4" and larger are grooved to suit a mechanical coupling and beveled for welding.
3) Dimensions showing location of coil and basin connections are approximate and should not be used for prefabrication of connecting piping.
4) For weight loadings and support requirements, refer to the suggested steel support drawing.
5) Heaviest section is the combined weight of fan and coil sections, refer to the P-Series Counterflow Induced Draft Coil Products rigging and assembly manual for suggested lifting method.
6) The area above the discharge must be unobstructed.
7) Do not support piping from unit connections. All necessary piping supports to be supplied by others.
8) M = Motor location

Right Hand Unit

ORDER NO:

DATE:

BALTIMORE AIRCOIL COMPANY

PCC Evaporative Condenser
Tabulated Unit Print

DRAWING NUMBER:
UP-PCC-1218