


Notes

- 1) All dimensions are in feet and inches. Weights are in pounds. Values listed are for standard construction units with no additional options and accessories; exact values may vary depending upon unit configuration.
- 2) Operating weight and weight loading are for units with water level in basin at overflow.
- 3) Unit support beams and anchor bolts to be designed and furnished by others.
- 4) Support beams must be flush and level at top.
- 5) Each beam should be designed, as a minimum, for 65% of the total unit operation weight applied as a uniformly distributed load.

Model Number	Operating Weight	Shipping Weight
XES15E-1212-09EN	16550	7840
XES15E-1212-09FN	16590	7880
XES15E-1212-09GC	16650	7940
XES15E-1212-09GN	16650	7940
XES15E-1212-09HC	16670	7960
XES15E-1212-09HN	16670	7960
S15E-1212-09JN	16770	8060
S15E-1212-09KN	16800	8090
S15E-1212-09LC	17050	8340
S15E-1212-09LN	17050	8340
XES15E-1212-10EN	17260	8200
XES15E-1212-10FN	17300	8240
XES15E-1212-10GC	17360	8300
XES15E-1212-10GN	17360	8300
XES15E-1212-10HC	17380	8320
XES15E-1212-10HN	17380	8320
XES15E-1212-10JN	17480	8420
S15E-1212-10KN	17510	8450
S15E-1212-10LC	17760	8700
S15E-1212-10LN	17760	8700
S15E-1212-10MN	17880	8820

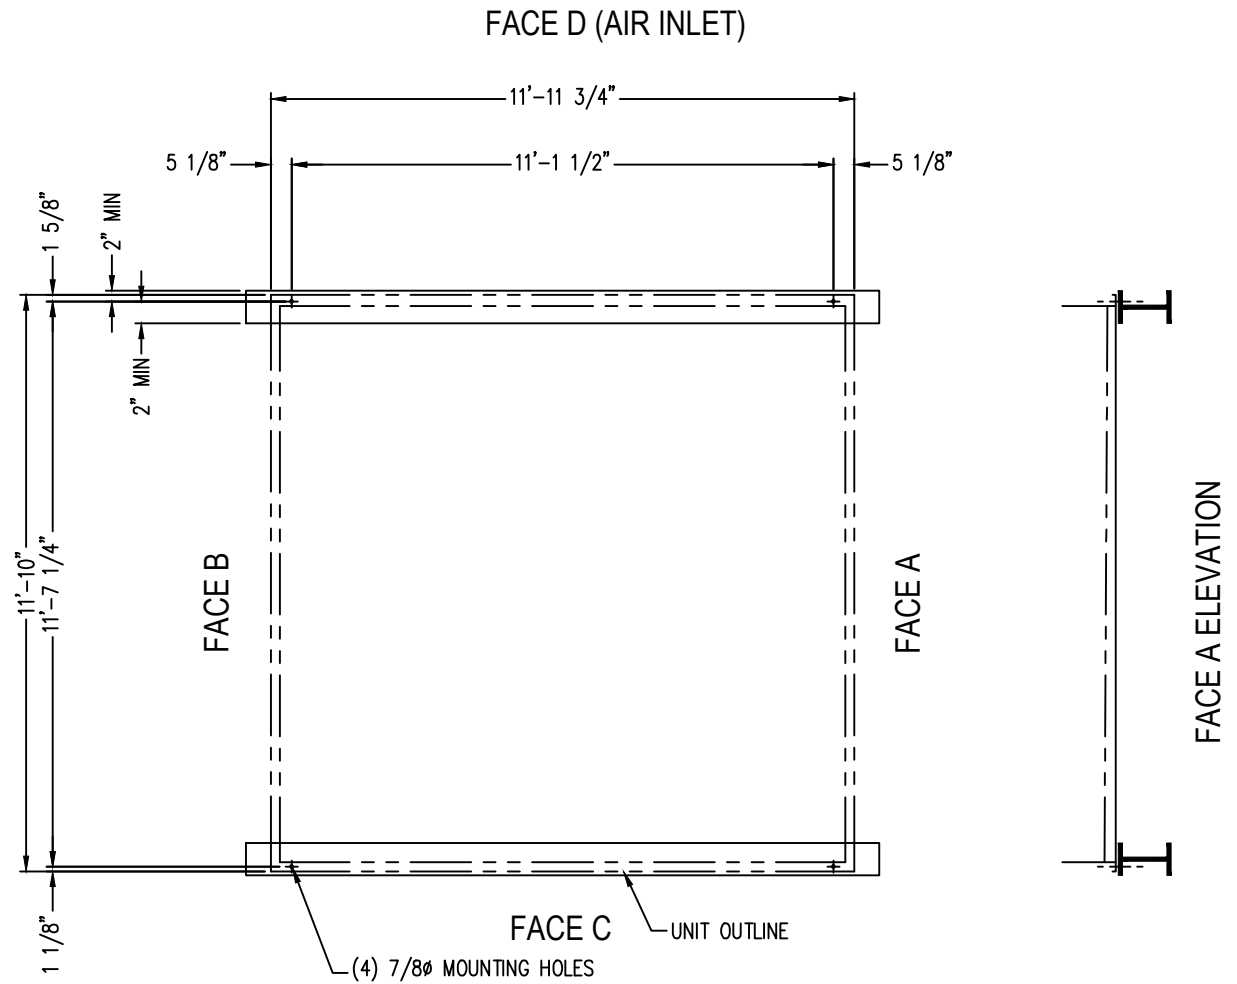

ORDER NO:
DATE: **3/18/2014**



Single Cell Unit Support
1212-09-10 Plan "A" Steel

DRAWING NUMBER:
SS-XE-S15E-1212-09-10