


Notes

- 1) All dimensions are in feet and inches. Weights are in pounds. Values listed are for standard construction units with no additional options and accessories; exact values may vary depending upon unit configuration.
- 2) Operating weight and weight loading are for units with water level in basin at overflow.
- 3) Unit support beams and anchor bolts to be designed and furnished by others.
- 4) Support beams must be flush and level at top.
- 5) Each beam should be designed, as a minimum, for 65% of the total unit operation weight applied as a uniformly distributed load.

Model Number	Operating Weight	Shipping Weight
XES15E-1218-11EN	28970	12830
XES15E-1218-11FN	29030	12890
XES15E-1218-11GN	29120	12980
XES15E-1218-11HN	29150	13010
XES15E-1218-11JN	29300	13160
S15E-1218-11KN	29340	13200
S15E-1218-11LC	29720	13580
S15E-1218-11LN	29720	13580
S15E-1218-11MN	29900	13760
XES15E-1218-12EN	30020	13360
XES15E-1218-12FN	30080	13420
XES15E-1218-12GN	30170	13510
XES15E-1218-12HN	30200	13540
XES15E-1218-12JN	30350	13690
S15E-1218-12KN	30390	13730
S15E-1218-12LC	30770	14110
S15E-1218-12LN	30770	14110
S15E-1218-12MN	30950	14290

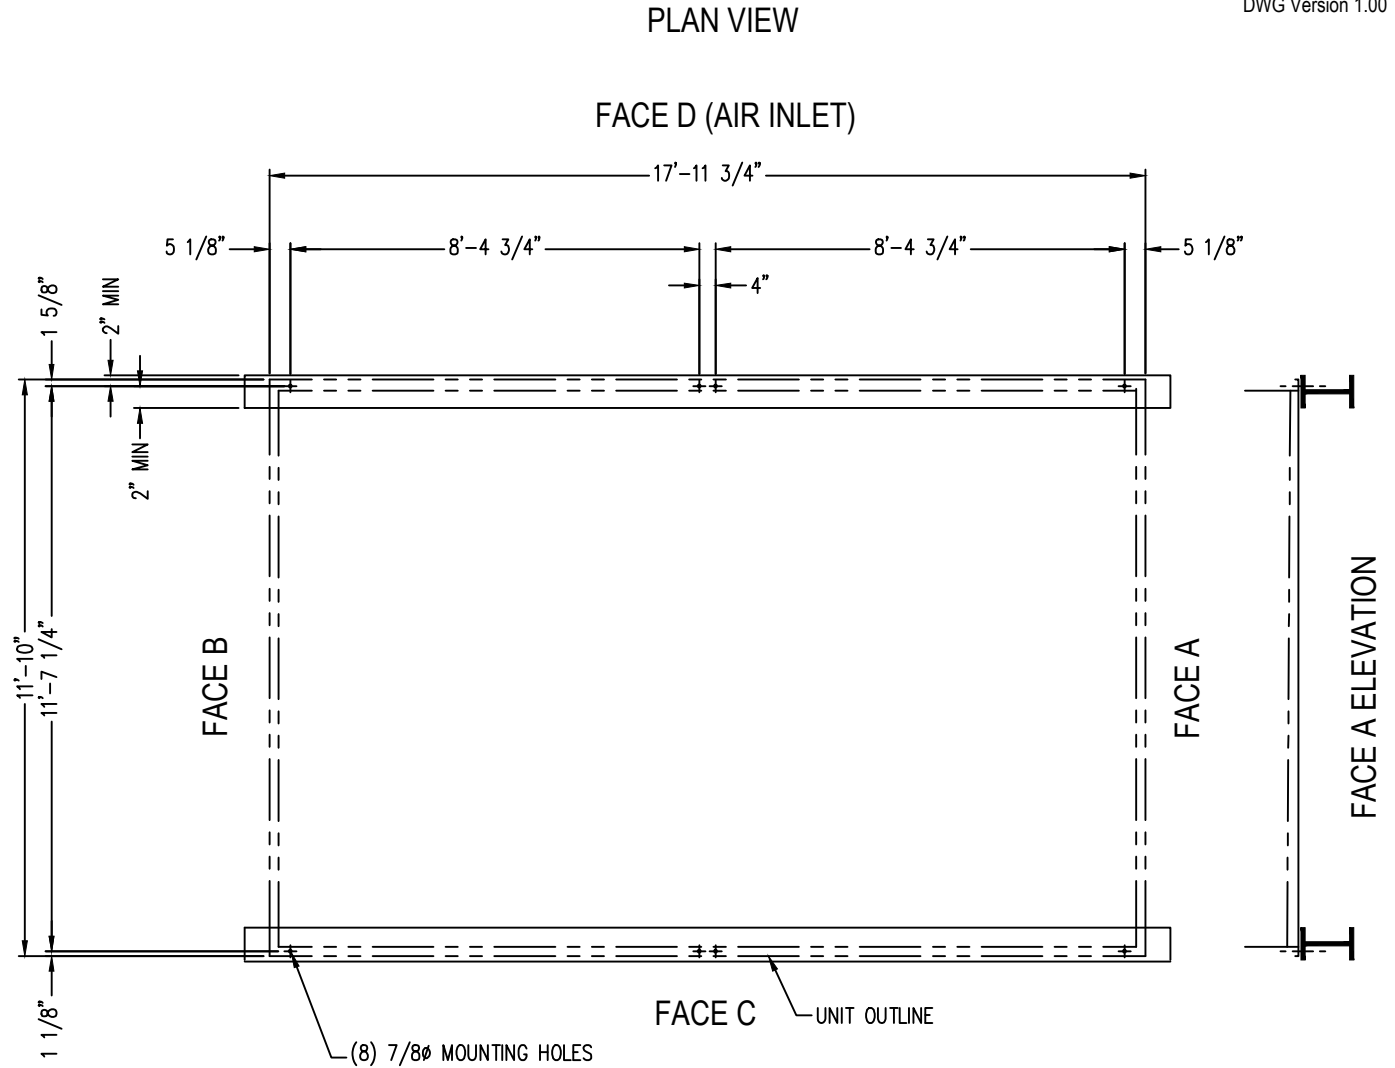

ORDER NO:

DATE: **3/18/2014**



BALTIMORE AIRCOIL COMPANY

**Single Cell Unit Support
1218-11-12 Plan "A" Steel**

DRAWING NUMBER:
SS-XE-S15E-1218-11-12