



FACE B

FACE A

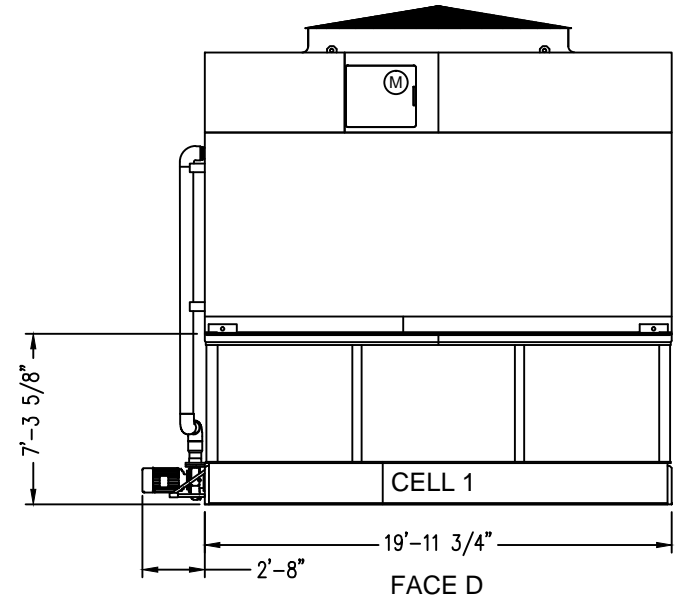

FACE D

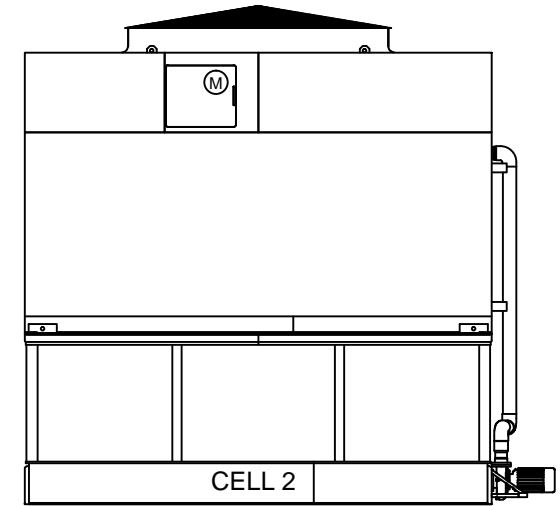

FACE D

Model Number	Approx. Shipping Weight	Approx. Operating Weight	Heaviest Section Weight	F	H
PCC-1088-2420N080	47897	71690	19273	4'-0 5/8"	19'-5 7/16"
PCC-0862-2420N030	49701	73630	20173	4'-8 1/8"	20'-0 15/16"
PCC-0982-2420N040	54821	79060	22733	4'-8 1/8"	20'-0 15/16"
PCC-1080-2420N060	54981	79220	22813	4'-8 1/8"	20'-0 15/16"
PCC-1162-2420N080	55421	79660	23033	4'-8 1/8"	20'-0 15/16"
PCC-1228-2420N100	55471	79710	23058	4'-8 1/8"	20'-0 15/16"
PCC-1038-2420N040	62957	87820	26803	4'-0 5/8"	19'-5 7/16"
PCC-1114-2420N050	66957	92070	28803	4'-0 5/8"	19'-5 7/16"
PCC-1134-2420N060	63117	87980	26883	4'-0 5/8"	19'-5 7/16"
PCC-1160-2420N060	67057	92170	28853	4'-0 5/8"	19'-5 7/16"
PCC-1182-2420N080	60277	84930	25463	4'-0 5/8"	19'-5 7/16"
PCC-1244-2420N080	67497	92610	29073	4'-0 5/8"	19'-5 7/16"
PCC-1280-2420N100	63607	88470	27128	4'-0 5/8"	19'-5 7/16"
PCC-1318-2420N100	67547	92660	29098	4'-0 5/8"	19'-5 7/16"
PCC-1378-2420N120	68049	93160	29349	4'-0 5/8"	19'-5 7/16"

Notes

- 1) Drawings are not to scale. All dimensions are in feet and inches.
- 2) Unless otherwise indicated, connections 3" and smaller are MPT. Connections 4" and larger are grooved to suit a mechanical coupling and beveled for welding.
- 3) Dimensions showing location of coil and basin connections are approximate and should not be used for prefabrication of connecting piping.
- 4) For weight loadings and support requirements, refer to the suggested steel support drawing.
- 5) Heaviest section is the combined weight of fan and coil sections, refer to the P-Series Counterflow Induced Draft Coil Products rigging and assembly manual for suggested lifting method.
- 6) The area above the discharge must be unobstructed.
- 7) Do not support piping from unit connections. All necessary piping supports to be supplied by others.
- 8) M = Motor location

ORDER NO:

DATE:



BALTIMORE AIRCOIL COMPANY

PCC-Evaporative Condenser
Tabulated Steel Support - Plan A

DRAWING NUMBER:
UP-PCC-2420