

TrilliumSeries[®]

Dry Cooler



*Designed for
continuous operation
with low sound*

HIGHEST CAPACITY DRY COOLER

TrilliumSeries[®] Dry Cooler

The TrilliumSeries[®] dry cooler provides energy savings for applications where water conservation is the top priority. It delivers the highest thermal capacity in the smallest footprint making it the industry's most efficient dry cooler for critical cooling applications.



ADVANCED HEAT REJECTION*

- **Optimized Airflow** using CFD analysis
- **Vertical Coil Design** for superior cooling
- **Huge Copper Coil** for most efficient heat rejection



MAXIMIZED UPTIME

- **Independent Fans, VFDs and Coils** provide redundancy for continuous operation and reduced downtime risk
- **Proven Belt-driven Baltidrive[®] Power Train** used in thousands of installations worldwide



LOW SOUND OPTIONS*

- **Quiet Unit Operation** to meet sound ordinances for high population areas
- **Night Quiet Operation** automatically optimizes performance and sound during overnight hours
- **Whisper Quiet Fans** reduce sound by up to 13dB




LOWEST COST INSTALLATION AND OPERATION*

- **Factory-wired Components and Controls** with BMS communication
- **Self-cleaning Mode** to minimize routine maintenance
- **Higher Unit Capacity** means fewer units requiring less space, steel support, field piping and wiring
- **Single Point Wiring and Coil Connections on a Single End** speed installation



TrilliumSeries® Dry Cooler

TECHNOLOGIES

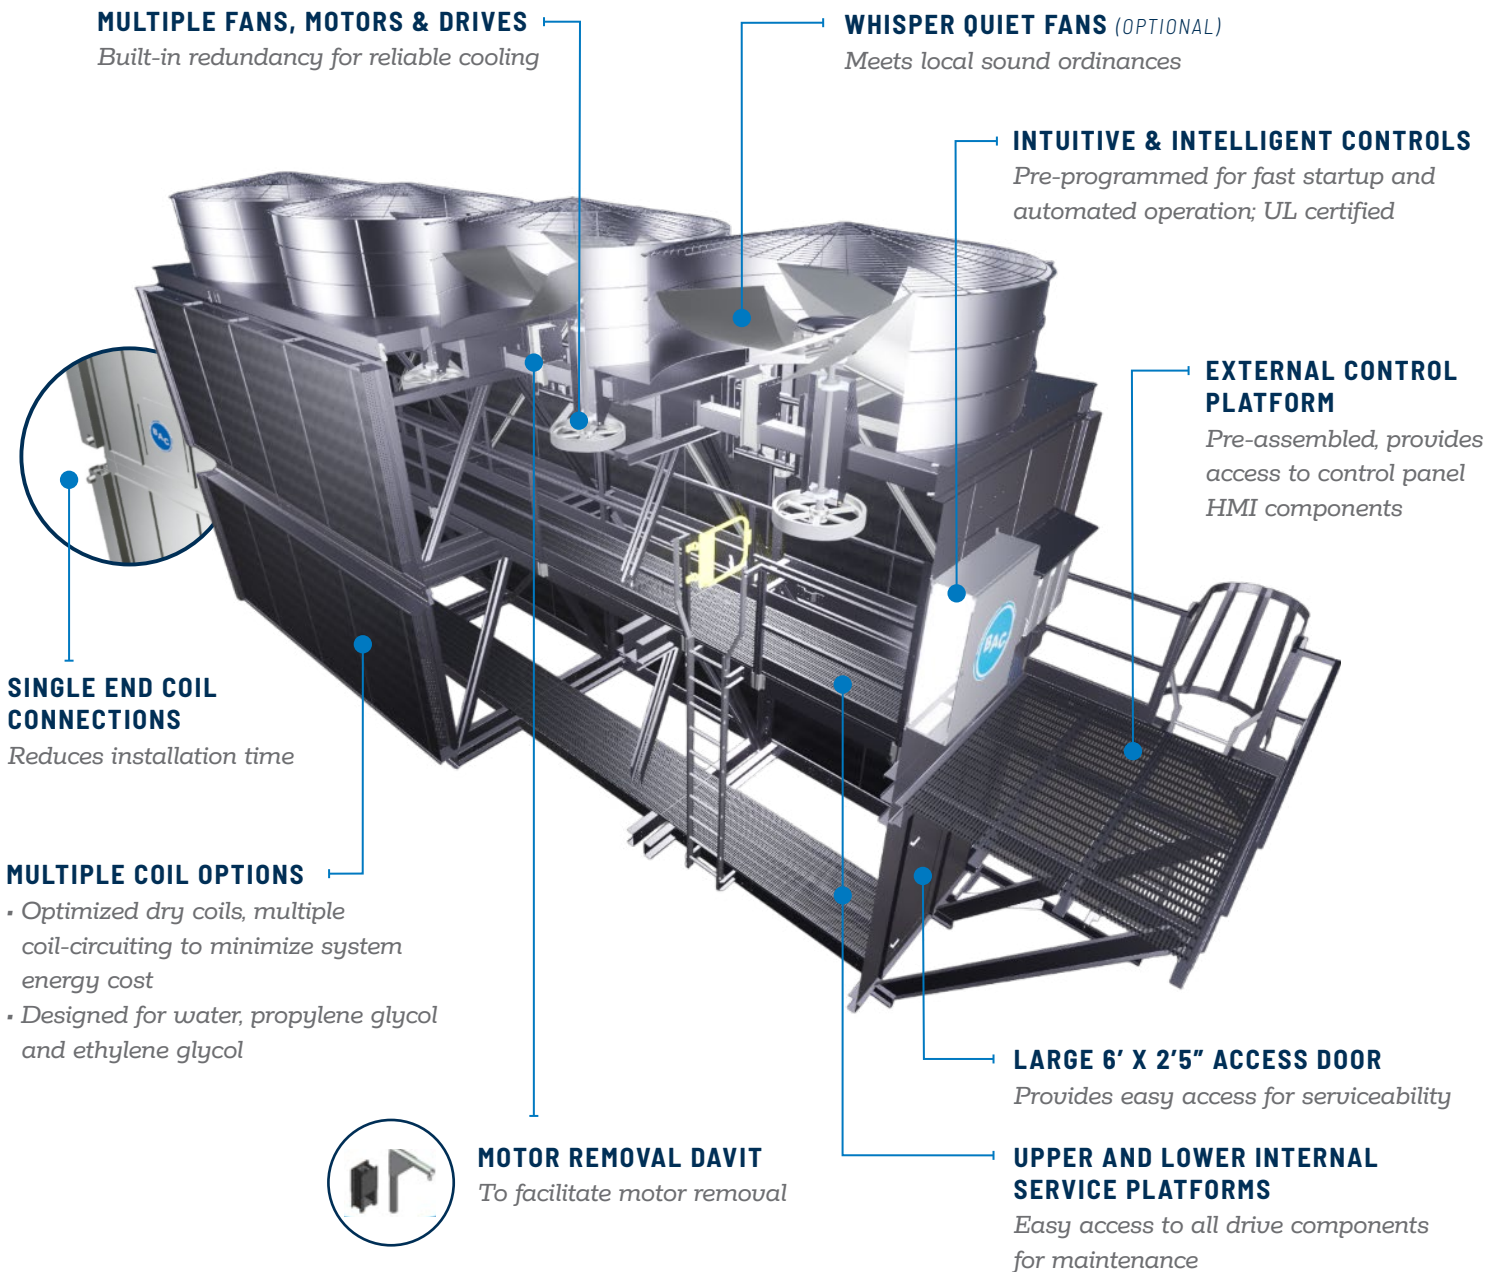

**AVAILABLE OPTIONS
TO MEET YOUR
APPLICATION NEEDS:**

- Whisper Quiet Fans
- Steel support installation
- Access door platform
- Coated fins for enhanced corrosion protection
- Variable horsepower options for site-specific applications

CAPACITY: UP TO 10,000 MBH*

AVAILABLE SIZES

Model	Fan Qty	Total HP	Installed Unit Dimensions**			
			Length	Width	Height	Operating Weight (lbs)
TDFS1238N-C60ET20B	4	80	38'-1"	11'-7"	19'-7"	49,483
TDFS1238N-C60ET25B		100				
TDFS1238N-C60ET30B		120				
TDFS1238N-C60ET35B		140				
TDFS1238N-C60ET40B		160				

*Nominal capacity based on a 115° F EWT and 105° F LWT at a 95° F dry bulb temperature.

**Unit dimensions do not include platforms or other optional accessories.

WHY BAC?

BAC is proud to be the world's cooling partner. Since 1938, we have been creating sustainable comfort cooling, process cooling, and refrigeration solutions for the most essential and demanding environments on earth. From pioneering cooling products to leading the industry toward a better tomorrow, BAC innovates for the future, so we can all advance together.



*Learn more
and contact your
Sales Representative*

BALTIMOREAIRCOIL.COM/PRODUCTS/DRY-COOLERS/TRILLIUMSERIES-DRY-COOLER

20+ GLOBAL LOCATIONS



7600 Dorsey Run Road | Jessup, MD 20794 | 410.799.6200

©2024 Baltimore Aircoil Company, Inc. BTDFS/20241004

BALTIMOREAIRCOIL.COM